


IKON

IKL306-PFA50 Structurally glazed



Typical detail

Product description

Blade Centre 30mm . Blade angle 59 degree.

Visual free area 58%. Physical free area 50%.

Frame depth 36.2mm

Designed for integration into structurally glazed curtain wall frames. Toggle glazing blocks are custom designed to suit individual systems. Overall glazing thickness 28mm.

Tested to EN 13030:2001

BSRIA Test report 60945/1

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh


Single skin, or double skin insulated blanking panels with or without plenum box.

K factor 19.7

Ce 0.225

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.0
0.5	99.0	A	1.0	11.8
1.0	97.4	B	1.5	26.6
1.5	91.2	C	2.0	47.2
2.0	64.5	D	2.5	73.9
2.5	40.9	D	3.0	106.4

Performance: airflow, louvre with insect mesh

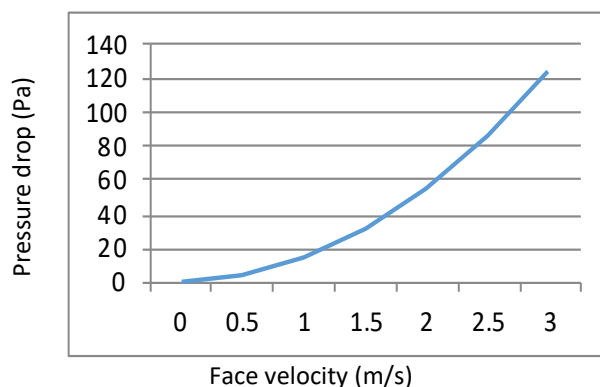

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 2—05/01/26