


IKON

IKL752 Glaze in louvre

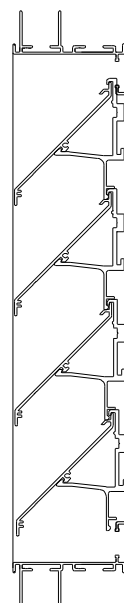

Product description

Blade Centre 75mm . Blade angle 45 degree.

Visual free area 86%. Physical free area 57%.

Frame depth 80.8mm

Glazing options 28mm standard

Other glazing depths can be provided

Tested to EN 13030:2002

BSRIA Test report 56834/1

K factor 19.04

Ce 0.232

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.8	A	Face Velocity 0.5	2.85
0.5	99.3	A	1.0	11.42
1.0	98.0	B	1.5	25.70
1.5	94.4	C	2.0	45.70
2.0	83.0	C	2.5	71.40
2.5	67.8	D	3.0	102.82

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel


Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels

with or without plenum box.

Performance: airflow, louvre with insect mesh

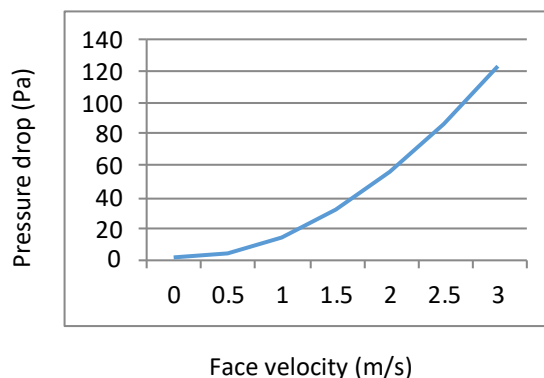

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk

Issue 2—05/01/26