


IKON



IKL33 Demountable louvre

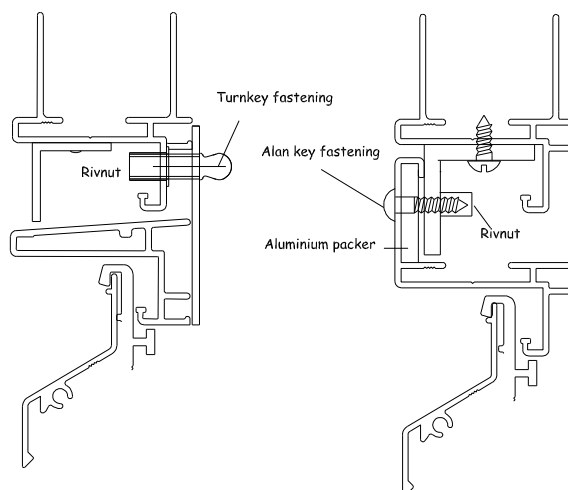

Internally demountable

Externally demountable

Product description

Louvre panel demountable from outerframe

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Can be constructed from most of the IKL33 outerframes. Flange, glaze in or rebated.

Louvre element tested to EN 13030:2002

BSRIA Test report 52719/1

Results of testing of the louvre element only shown.

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh


Single skin, or double skin insulated blanking panels

K factor 22.91

Ce 0.208

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.43
0.5	99.4	A	1.0	13.75
1.0	97.4	B	1.5	30.93
1.5	81.4	C	2.0	54.98
2.0	49.9	D	2.5	85.91
2.5	32.4	D	3.0	123.71

Performance: airflow, louvre with insect mesh

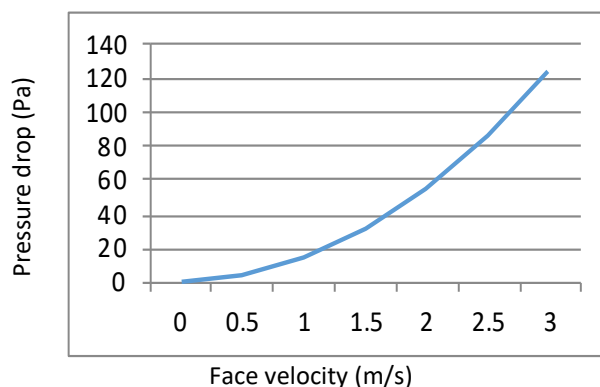

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 2—05/01/26