


IKON

IKL33 Panel louvre



Product description

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Louvre constructed as a cassette, fitted to both sides of the panel.

Suitable for fixing to aluminium insulated or composite panels. Minimum panel depth 24mm.

Tested to EN 13030:2002

BSRIA Test report 52719/1

K factor 22.91

Ce 0.208

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.43
0.5	99.4	A	1.0	13.75
1.0	97.4	B	1.5	30.93
1.5	81.4	C	2.0	54.98
2.0	49.9	D	2.5	85.91
2.5	32.4	D	3.0	123.71


Options

Standard RAL or BS colours. Anodizing to special order.

Insect mesh

Bird mesh

Performance: airflow, louvre with insect mesh

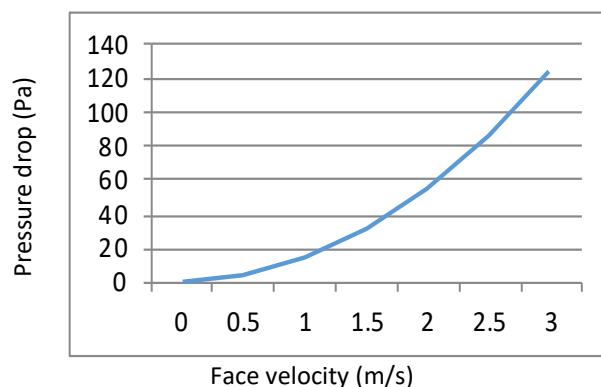

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 1—05/01/26