


IKON

IKL331 Flange frame louvre



Product description

Blade Centre 34mm . Blade angle 60 degree.
 Visual free area 59%. Physical free area 43.5%.
 Frame depth 36.2mm
 21.1mm flange
 Tested to BS EN 13030:2001
 BSRIA Test report 104080/2

Can be supplied with fixing lugs if required

K Factor 23.56


Ce 0.206

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.5	A	Face Velocity 0.5	6.70
0.5	98.6	B	1.0	20.0
1.0	95.8	B	1.5	39.7
1.5	78.3	D	2.0	65.9
2.0	44.0	D	2.5	98.7
2.5	24.4	D	3.0	137.9

Options

Standard RAL or BS colours. Anodizing to special order.
 Drainage channel
 Insect mesh
 Bird mesh
 Single skin, or double skin insulated blanking panels
 with or without plenum box.

Performance: airflow, louver with insect mesh

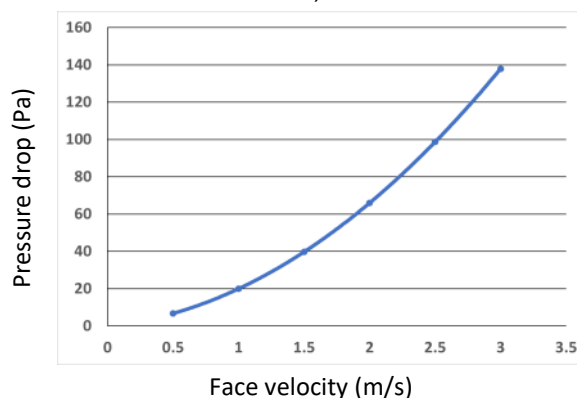

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk