


IKON

IKL332 Glaze in louvre



Product description

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Frame depth 36.2mm

Glazing options 24mm, 28mm and 32mm as standard

Other glazing depths can be provided

Tested to EN 13030:2001

K Factor 23.56

Watertightness

Velocity 0.0

0.5

1.0

1.5

2.0

2.5

%

99.5

98.6

95.8

78.3

44.0

24.4

Class

A

B

B

D

D

D

Ce 0.206

Pressure Drop

Face Velocity 0.5

1.0

1.5

2.0

2.5

3.0

Pd

6.70

20.0

39.7

65.9

98.7

137.9

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel


Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels

with or without plenum box.

Performance: airflow, louvre with insect mesh

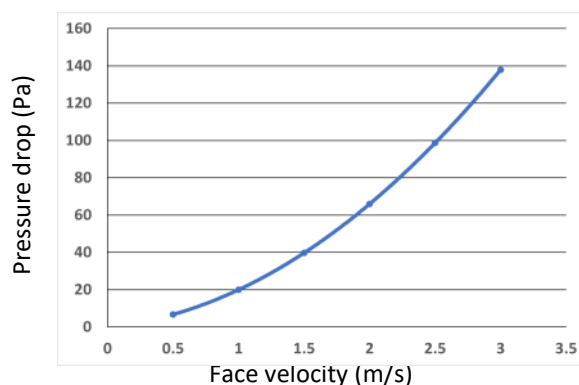

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk

Issue 2—05/01/26