


IKON

IKL50 Demountable Louvre

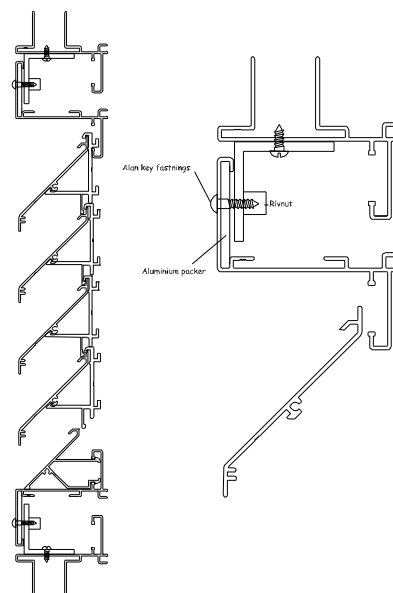

Product description

Louvre panel demountable from outerframe

Can be constructed from most of the IKL50 outerframes. Flange, glaze in or rebated.

Blade Centre 50mm . Blade angle 45 degree.

Visual free area 79%. Physical free area 50%.

Louvre element tested to EN 13030:2002

BSRIA Test report 54729/1

Results of testing of the louvre element only shown


Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel, insect mesh, bird mesh

Single skin, or double skin insulated blanking panels.

K factor 14.23			Ce 0.265	
Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.4	A	Face Velocity 0.5	2.13
0.5	98.8	B	1.0	8.54
1.0	97.0	B	1.5	19.21
1.5	92.3	C	2.0	34.15
2.0	86.8	C	2.5	53.36
2.5	76.1	D	3.0	76.84

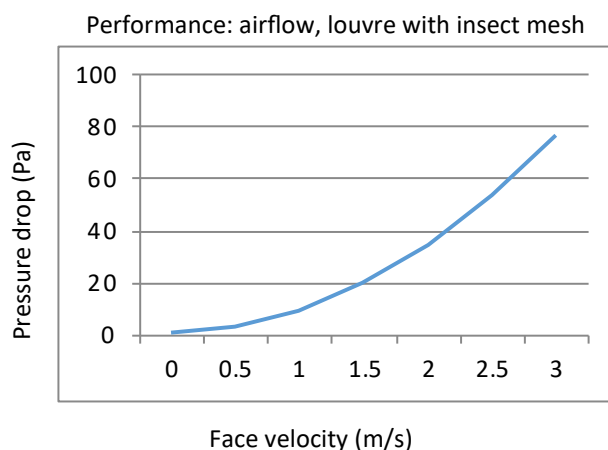

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk