


IKON

IKL50 Hinged

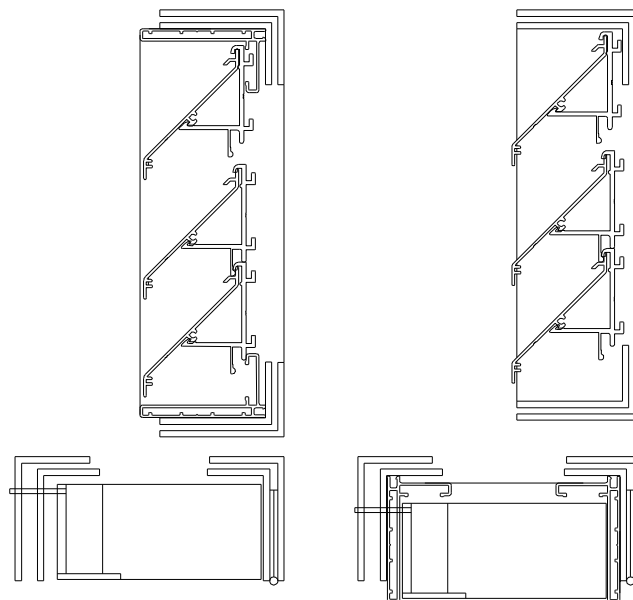

Product description

Butt hinged side hung opening panel complete with budget locking

Opens out

Blade Centre 50mm . Blade angle 45 degree.

Visual free area 79%. Physical free area 50%.

Frame depth 63.5mm

Custom outerframe options utilizing channels, angles or pressings.

Louvre element tested to EN 13030:2002

BSRIA Test report 54729/1

Results of testing of the louvre element only shown

Options

Standard RAL or BS colours. Anodizing to special order.

Insect mesh


Bird mesh

K factor 14.23

Ce 0.265

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.4	A	Face Velocity 0.5	2.13
0.5	98.8	B	1.0	8.54
1.0	97.0	B	1.5	19.21
1.5	92.3	C	2.0	34.15
2.0	86.8	C	2.5	53.36
2.5	76.1	D	3.0	76.84

Performance: airflow, louvre with insect mesh

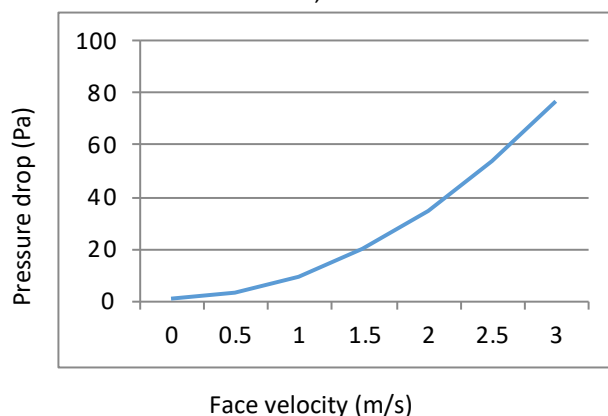

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 2—05/01/26