


# IKON

## IKL50 Hurricane

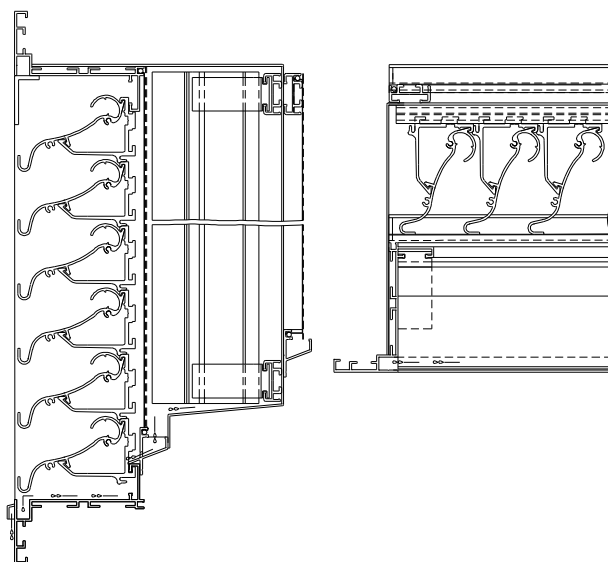

### Product description

Blade Centre 50mm . Blade angle 25 degree.

Visual free area 75%. Physical free area 47%.

Frame depth 225mm

33.5mm flange

Tested to EN 13030:2002

BSRIA Test report 57986/1

Class A at a velocity of 1.5m/s

K factor 29.39

Ce 0.185

| Watertightness | %    | Class | Pressure Drop     | Pd     |
|----------------|------|-------|-------------------|--------|
| Velocity 0.0   | 99.9 | A     | Face Velocity 0.5 | 4.41   |
| 0.5            | 99.7 | A     | 1.0               | 17.63  |
| 1.0            | 99.7 | A     | 1.5               | 39.68  |
| 1.5            | 99.6 | A     | 2.0               | 70.54  |
| 2.0            | 98.3 | B     | 2.5               | 110.21 |
| 2.5            | 96.5 | B     | 3.0               | 158.71 |

### Options


Standard RAL or BS colours. Anodizing to special order.

Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels  
with or without plenum box.

Performance: airflow, louvre with insect mesh

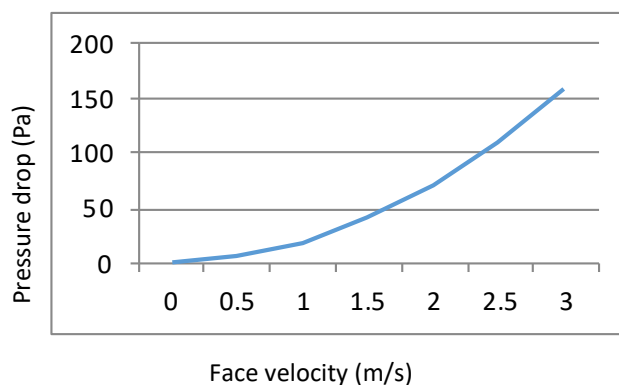

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : [www.ikonaluminium.co.uk](http://www.ikonaluminium.co.uk), Sales : [info@ikonaluminium.co.uk](mailto:info@ikonaluminium.co.uk)

Issue 2—05/01/26