


IKON

IKL50 PAS24 louvre

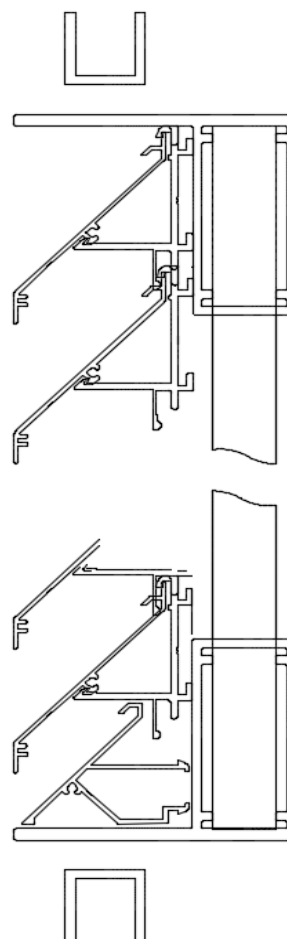

Product description

Blade centre 50mm, Blade angle 45 degree

Frame depth 90mm

Fully welded frame construction

20mm diameter steel bars at max 50mm centres

Bird mesh as standard (please note this will reduce free area)

*Visual free area 61.8%. *Physical free area 30%

(*approximate free area subject to mid-rail sizes)

Optional mechanically fixed U Channel for glazing requirements

Tested to PAS 24:2022+ A1:2024 Annex A&B

Element test report; WIL 559366—11-06-2026

Options

Standard RAL or BS colours.

Please note—This test is based on the louvre only. The integrity of the surrounding area that the louvre is being installed is the responsibility of the designer not the louvre manufacturer.

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 3—15/06/26