


IKON

IKL50 STS202 louvre

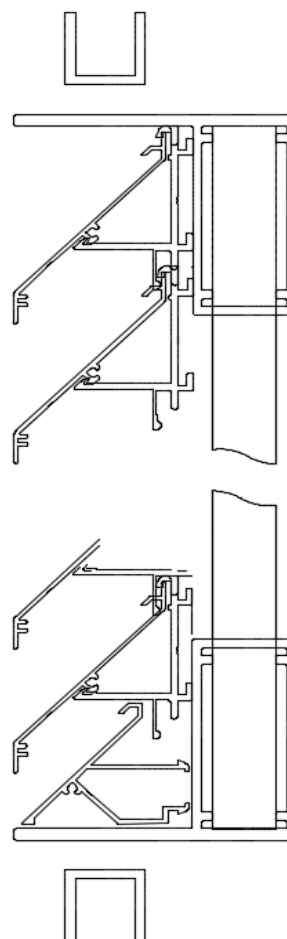

Product description

Blade centre 50mm, Blade angle 45 degree

Frame depth 90mm

Fully welded frame construction

20mm diameter steel bars at max 50mm centres

Bird mesh as standard (please note this will reduce free area)

*Visual free area 61.8%. *Physical free area 28%

(*approximate free area subject to mid-rail sizes, 3 no mid rails)

Optional mechanically fixed U Channel for glazing requirements

Tested to STS 202 Issue 10 November 2021

Element test report; WIL 552666-2—18-09-2025

Options

Standard RAL or BS colours.

Please note—This test is based on the louvre only. The integrity of the surrounding area that the louvre is being installed is the responsibility of the designer not the louvre manufacturer.

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 1—05/01/26