


IKON

IKL50 Tornado

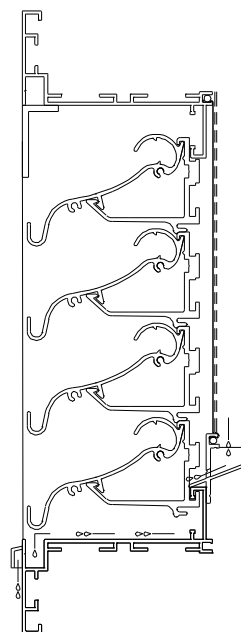

Product description

Blade Centre 50mm . Blade angle 25 degree.

Visual free area 75%. Physical free area 47%.

Frame depth 100mm

33.5mm flange

Tested to EN 13030:2002

BSRIA Test report 57596/1

Class A at a velocity of 0.5m/s

K factor 11.75

Ce 0.293

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	1.76
0.5	99.1	A	1.0	7.05
1.0	98.2	B	1.5	15.86
1.5	97.3	B	2.0	28.20
2.0	93.7	C	2.5	44.06
2.5	86.7	C	3.0	63.45

Options


Standard RAL or BS colours. Anodizing to special order.

Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels
with or without plenum box.

Performance: airflow, louvre with insect mesh

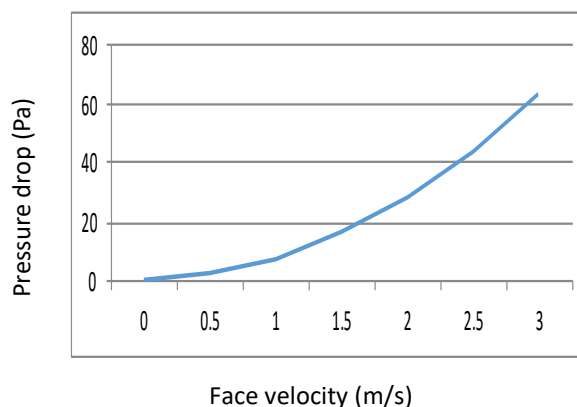

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.co.uk, Sales : info@ikonaluminium.co.uk

Issue 2—05/01/26