


IKON



IKL504 Face fixed louvre

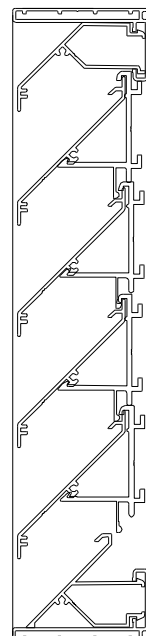

Product description

Blade Centre 50mm . Blade angle 45 degree.

Visual free area 79%. Physical free area 50%.

Frame depth 64.3mm

Tested to EN 13030:2002

BSRIA Test report 54729/1

K factor 14.23

Ce 0.265

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.4	A	Face Velocity 0.5	2.13
0.5	98.8	B	1.0	8.54
1.0	97.0	B	1.5	19.21
1.5	92.3	C	2.0	34.15
2.0	86.8	C	2.5	53.36
2.5	76.1	D	3.0	76.84

Options

Standard RAL or BS colours. Anodizing to special order.


Drainage channel, dependant upon fixing detail.

Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels with or without plenum box. Dependant upon fixing detail

Performance: airflow, louvre with insect mesh

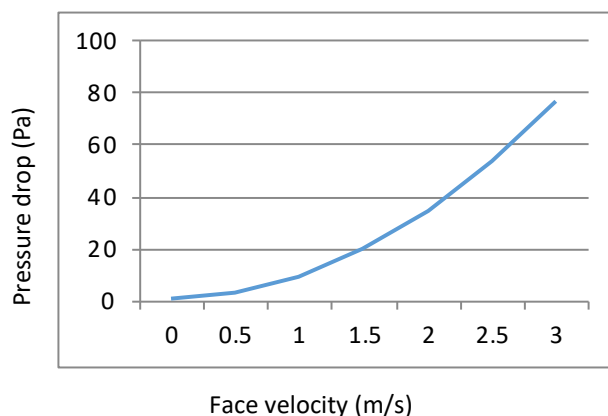

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk